




# FEMALE HEADER 1.0 180° DIP TYPE SINGLE ROW 02 TO 50 CONTACTS

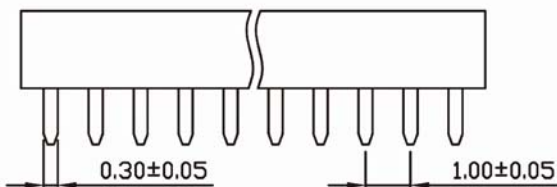

## SPECIFICATIONS

CURRENT RATING:0.8A  
 OPERATING TEMP RANGE: -40°C TO +105°C  
 MAX PROCESSING TEMP:NY6T:260°C FOR 10 SECONDS  
 LCP:260°C FOR 10 SECONDS  
 INSULATOR MATERIAL: LCP OR NY6T BLACK  
 CONTACT MATERIAL:PHOSPHOR BRONZE  
 PLATING:GOLD FLASH OR OTHER

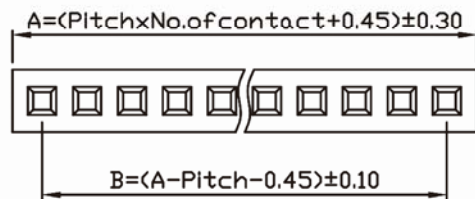

P.C.B LAYOUT

