

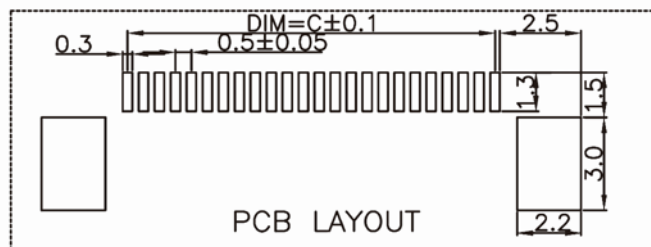
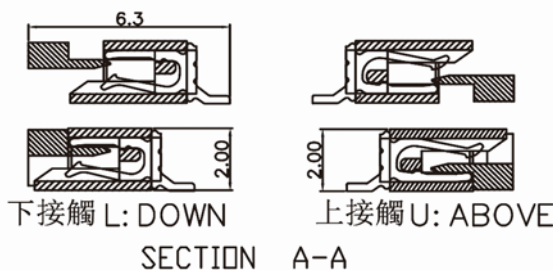



FPC P0.5 SMD UP/DOWN SERIES TYPE SINGLE ROW 04 TO 60 CONTACTS

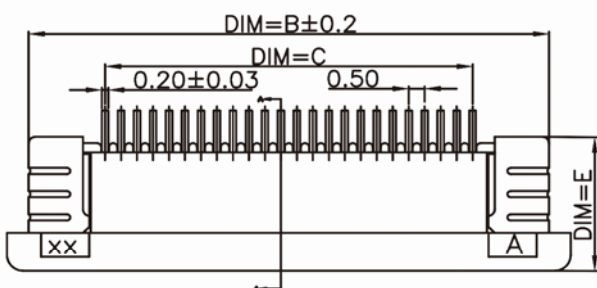

SPECIFICATIONS

CURRENT RATING:0.4A @80°C AMBIENT
 OPERATING TEMP RANGE: -25°C TO +85°C
 MAX PROCESSING TEMP:LCP:260°C FOR 10 SECONDS
 INSULATOR MATERIAL: LCP
 CONTACT MATERIAL:PHOSPHOR BRONZE,BRASS
 PLATING:TIN OR GOLD

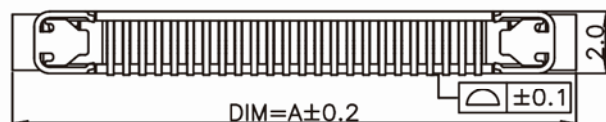

| PIN NO. | DIM. A | DIM. B | DIM. C | DIM. D |
|---------|------------------------------|-----------|------------|------------|
| 4~N~60 | N*0.5+5.6 | N*0.5+4.5 | N*0.5-0.50 | N*0.5+0.60 |
| DIM. E | 4~N~34 E=4.4 ; 35~N~40 E=4.9 | | | |

